



DM-B11 MOULDED PARTS


Heat shrink cable straight boot

Features


- Made of semi-rigid flame-retarded polyolefin.
- Used for strong mechanical protection, connector/cable strain relief, and complete environmental sealing.
- This family of boots has no lip.
- Provided with or without adhesive lining.
- Standard color: Black.

Dimensions

| Size (mm) | D1 | | | D2 | | | Length (mm)±10% | | | |
|-------------|-------------|-----------------|----------------------|-------------|-----------------|----------------------|-----------------|----|----|-----|
| | As supplied | After Recovered | Range of Application | As supplied | After Recovered | Range of Application | L | L1 | L2 | δ |
| 11/5-2 | 11 | 5.0 | 6.6-9.0 | 11 | 2.0 | 2.2-5.6 | 40 | 21 | 12 | 1.8 |
| 18/7-4 | 18 | 7.0 | 8.8-15.0 | 18 | 4.0 | 5.0-10.0 | 50 | 19 | 28 | 2.0 |
| 24/11-5.6 | 24 | 11.0 | 14.0-20.0 | 24 | 5.6 | 7.0-14.0 | 50 | 27 | 16 | 2.0 |
| 30/14.3-6.6 | 30 | 14.3 | 17.8-25.0 | 30 | 6.6 | 8.2-16.0 | 60 | 39 | 16 | 2.0 |
| 32/17.8-7.2 | 32 | 17.8 | 22.3-27.0 | 32 | 7.2 | 9.0-18.0 | 68 | 40 | 18 | 2.2 |
| 40/22.4-8.4 | 40 | 22.4 | 26-32.0 | 40 | 8.4 | 10.0-21.0 | 82 | 52 | 20 | 2.2 |
| 46/28-10 | 46 | 28.0 | 32-36.0 | 46 | 10.0 | 11.8-24.0 | 85 | 45 | 20 | 2.5 |

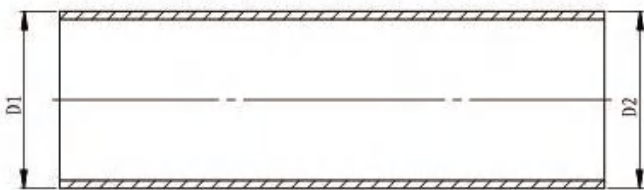

As supplied (a)

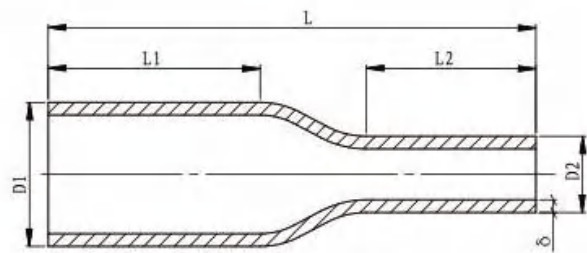

After unrestricted recovery (b)